


# USB RELAY CONTROLLER

FOR ELECTRICAL OR ELECTRONIC EQUIPMENT, TOTALLY POWERED FROM A USB PORT

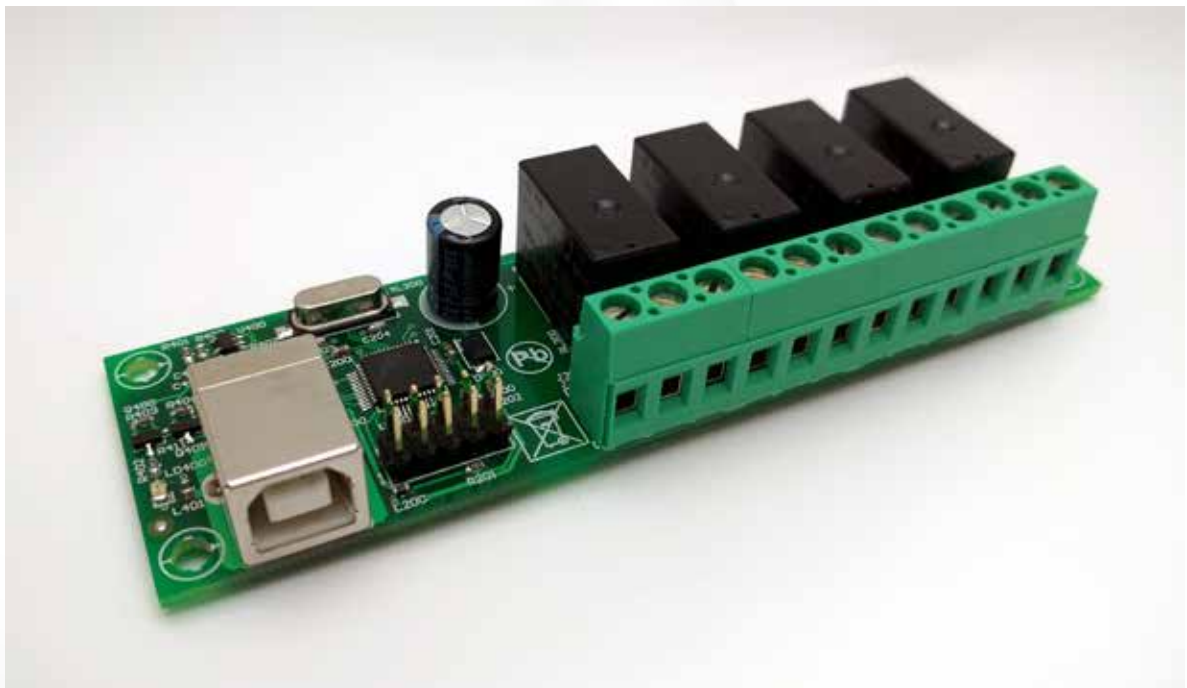

## APPLICATIONS

» INDUSTRIAL EQUIPMENTS


» HOME AUTOMATION

» ... AND MANY OTHERS




# TECHNICAL INFORMATION

APPLICATIONS	Basic process control
INTERFACES	USB port powered Communications: 1 x USB 1.1 and 2.0 Output: 4 x Relays
USB DRIVERS	Windows 10 Windows 8 Windows 7 Windows Vista Windows XP x64
OUTPUT ELECTRICAL CHARACTERISTICS	Contact type: SPST [Model 60010790]; SPDT [Model 60010803] Contact ratings: 125W, 125VA Max. switching voltage: 30V DC , 277V AC Max. switching current: 5A Max. carrying current: 5A
OPERATING TEMPERATURE	0 to 70 (°C)
DIMENSIONS	112 x 33,2 (mm) - Small footprint
WEIGHT	60g

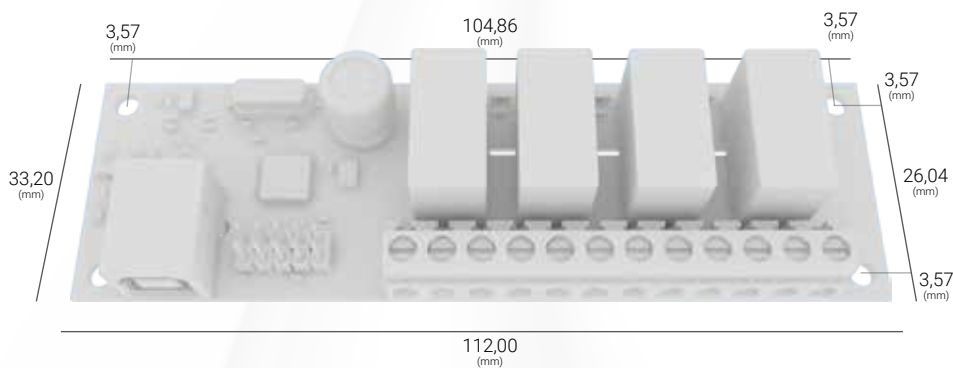

## SETTING UP

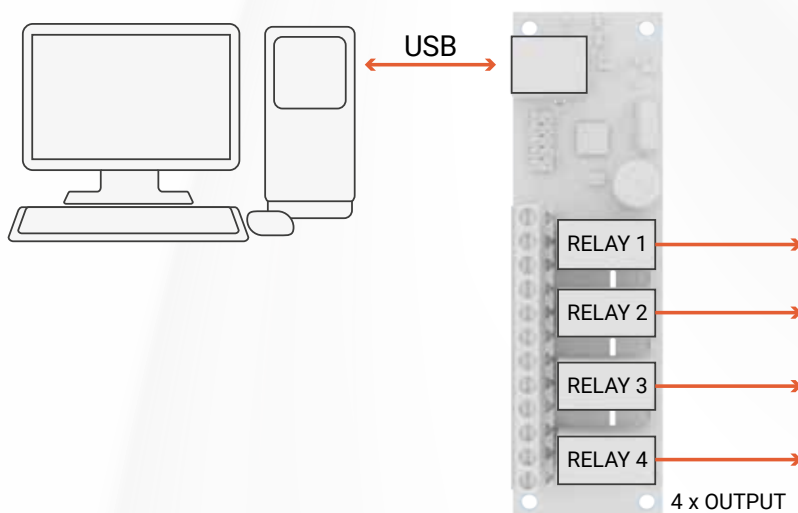

MODEL  
SPST - 60010790  
SPDT - 60010803  
DOCUMENT CODE  
114300019A