

## SIGNAL ACQUISITION BOARD

FOR ACQUIRING STATE SIGNALS AND TEMPERATURE, CONTROLLED AND POWERED BY USB PORT



### APPLICATIONS


- » INDUSTRIAL PROCESSES
- » ALARMING SYSTEMS

- » ACCESS CONTROL
- » ... AND MANY OTHERS



# TECHNICAL INFORMATION

INTERFACES	<p>Communications: 1 x USB 1.1 and 2.0</p> <p>Operation: Inputs: 4 x Dry contact 1 x Internal temperature sensor Option - External temperature sensor</p> <p>Output: 1 x Relay (SPST)</p>
USB DRIVERS	<p>Windows 10 Windows 8 Windows 7 Windows Vista Windows XP x64</p>
OUTPUT ELECTRICAL CHARACTERISTICS	<p>Max. switching voltage: 30V DC , 250V AC Max. switching current: 5A</p>
INTERNAL TEMPERATURE SENSOR	Range: -25 to +70 (°C)
OPERATING TEMPERATURE	-55 to +75 (°C)
MAXIMUM OPERATING HUMIDITY	80%
DIMENSIONS	59,24 x 33,18 x 2,5 (mm)
WEIGHT	60g

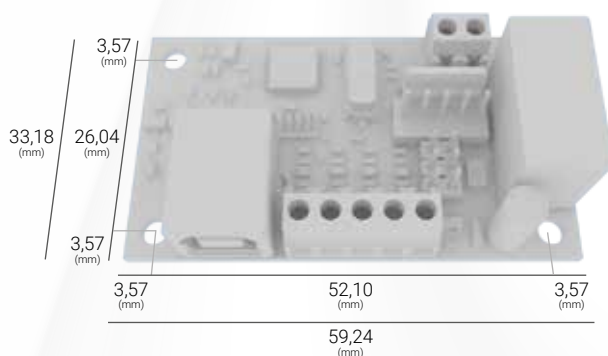

## SETTING UP

